

No Matter the Repair, Trust Chief's Full Line of Welders, Joining Products and Shop Tools. **NOTHING ELSE IS A CHIEF.**

NOTHING ELSE IS A **CHIEF**

NEW!



MultiMig621

MultiMig522
128-EL900010



Fume Extractor
128-CHF1001



ROTUNDA

Contact your Field Service Engineer or Rotunda Area Sales Manager



MultiTool Workstation



Vulcan ADU

MI200T™

ELEKTRON TRUE AUTOMODE

Chief's New MI200T Spot Welder is the ideal solution for all high strength steel body repairs.

- Simple to use LCD user interface
- Ergonomic and lightweight pliers
- Up to 14500A output power at 40% less input power*
- High duty cycle without waiting for cool down
- Liquid cooled to the tips
- Nearly 20' of welding cable provides increased reach
- C-pliers with multiple size arms available

*power usage compared to standard cable pliers welders



Rotunda Part#
128-CEL02500



THE NEW MI200T FEATURES A COMPACT TECHNICIAN FRIENDLY CONTROL PANEL

Elektron TrueAutomode:

- Detects and adjusts welding parameters
- Logs data for each repair
- Provides feed back on the results of every weld



1.800.ROTUNDA
www.OneRotunda.com

Lit# CHIEF MI200T 04/16
©2016 VEHICLE SERVICE GROUPSM
Printed in the U.S.A. All Rights Reserved. Unless otherwise indicated, CHIEF AUTOMOTIVE TECHNOLOGIES, VEHICLE SERVICE GROUPSM, DOVER and all other trademarks are property of the Dover Corporation and its affiliates. Chief Automotive Technologies reserves the right to alter product specifications and/or package components without notice, excluding changes to components subject to FCC & IC regulations.





Every MI200T Comes Ready to Weld with this Standard Equipment:



Overhead Balancer



Insulated C1 Arm



360° Gyro C Arm



Arm Mounting Bracket




Starter Box of Caps

Customize your Welder with These C - Arms:

Customize your MI200T with the multiple arms available for all of your welding needs.




C1 Arm (CEL019140)
Insulated C1 (CEL021402)




C2 Arm (CEL019133)
Insulated C2 (CEL022386)




C3 Arm (CEL019157)
Insulated C3 (CEL021419)




C4 Arm (CEL019164)
Insulated C4 (CEL021426)



C5 Arm (CEL019294)
Insulated C5 (CEL022393)




C6 Arm (CEL019775)
Insulated C6 (CEL022409)




C7 Arm (CEL020009)
Insulated C7 (CEL021433)



C8 Arm (CEL020016)
Insulated C8 (CEL021440)



Insulated C9 (CEL020078)



C10 Arm (CEL051638)



C11 Arm (CEL053649)



Single Sided Kit (CEL051010)



C2 + Insulated C3 and C4
(CEL021457)




C2 + C3 + C4
(CEL019126)



C2 + C3 + C5 + C6 + Insulated C9
(CEL050044)

All C arms rated 550daN except C6 and C10.

C Arm Applications:

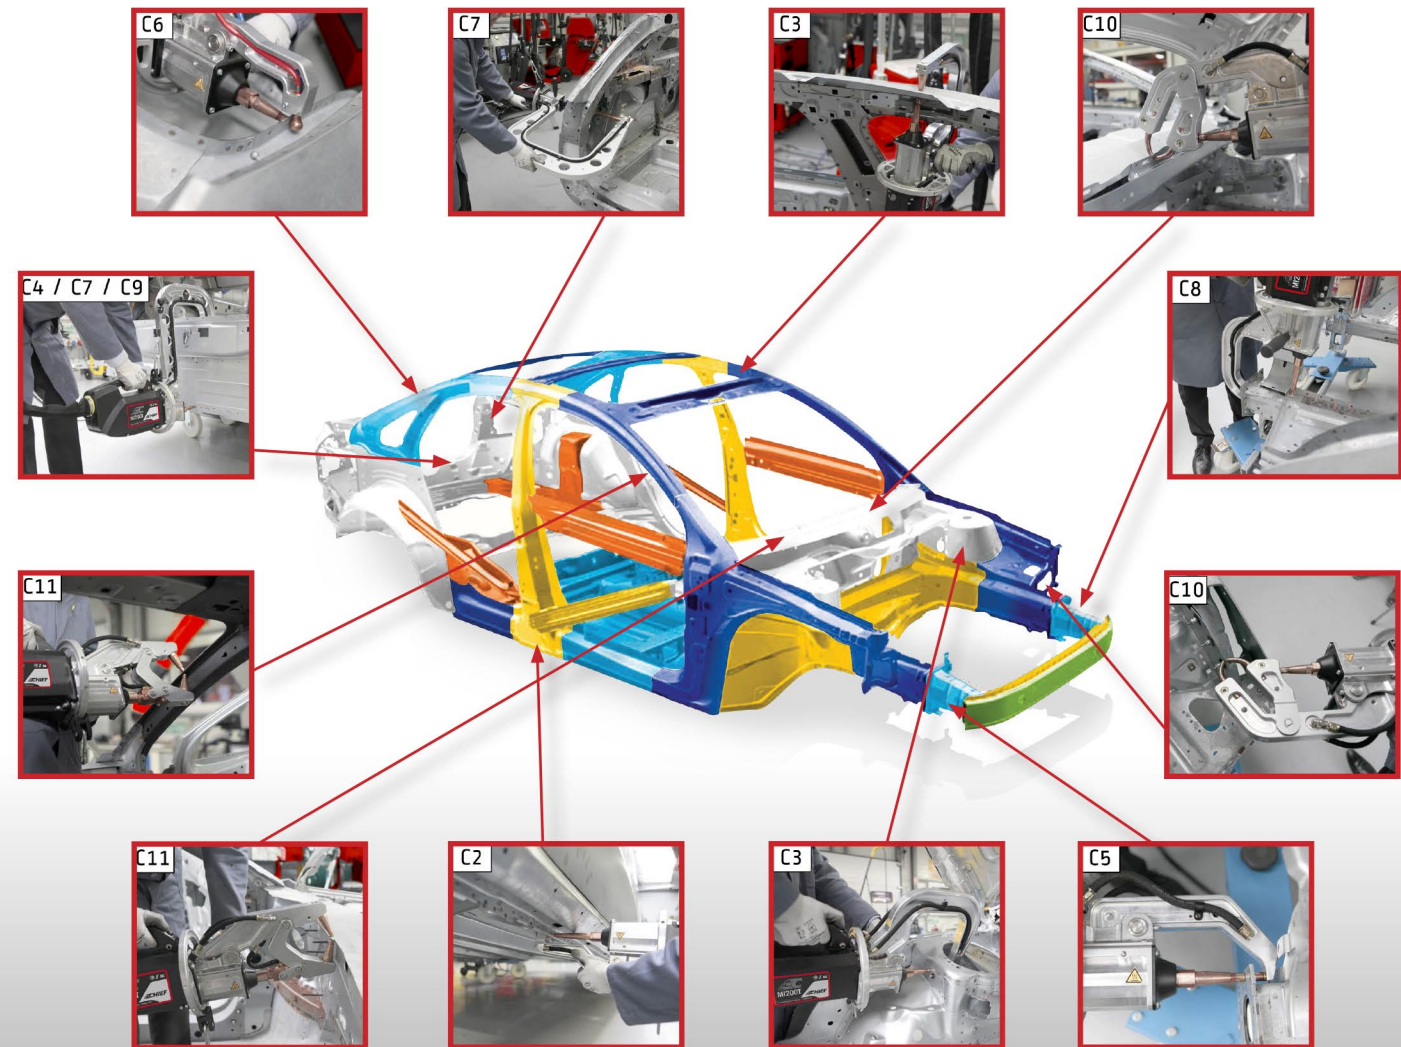

MI200T Performance Specifications:

SPECIFICATIONS	MI200T
Power Supply	208-240V (3 phase)
Fuse	40 A slow blowing
Frequency	50/60 Hz
Supply Power	14 kVA (80 kVA max)
Nominal Power by 50% ED	20kVA
Welding Current Max.	14,500 A DC (at 230V)
Electrode Force	550 daN with 8 bars (1236 lbf with 116 PSI)
Ambient Temperature	41° to 113° F (5° to 45° C)

SPECIFICATIONS	MI200T
Protective System	IP 21
Pliers Weight	23.1 lbs. (10.5 kg)
Weight without Accessories	Approx. 220 lbs. (100 kg)
Dimensions H / W / D	36.4" / 25.6" / 31.5" (92.5 x 65 x 80 cm)
Cable Length	Input mains cable: 26' (8m) Weld cable: 20' (6m)
Quantity of Cooling Liquid	8 gallons (30 liters)