



ROTUNDA


General Inspection and Usage for ESST Threaded Rod, Forcing Screws and Bolts

Visual inspection before usage:


1. Ensure rod is not bent, twisted, or modified.
2. Check for uniformity of the threads, Ensure thread gaps look consistent.
3. Look for hairline cracks or damage to the threads.
4. Verify that both nuts rotate freely along the full length of the threaded rod.
5. If there is a hex head, check for damage or rounded corners that could be stripped

Proper usage:


1. Never use power tools (ex: impact gun, impact driver, etc.) with any ESST threaded rod or forcing screw. Only hand tools should be used.
2. If your ESST was supplied with extreme pressure lubricant, apply to threads before each use. If additional extreme pressure lubricant is needed, order lubricant part number J-23444-A through Rotunda (package of 5 tubes of extreme pressure lube).
3. Wear proper safety equipment. (ex: safety glasses).

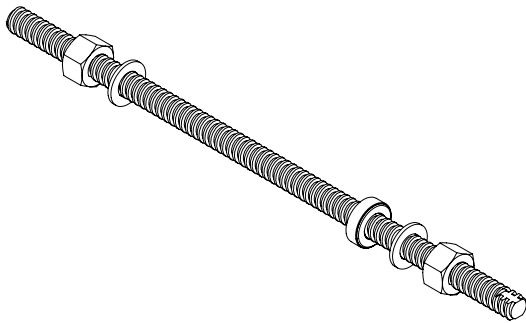


Example of thread rod with hardware

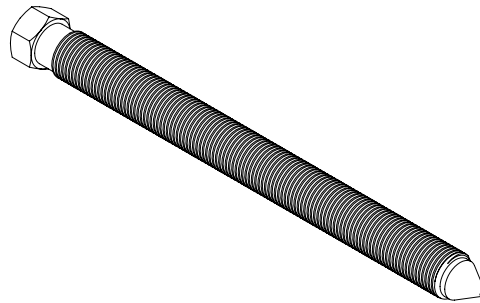

Example of forcing screw

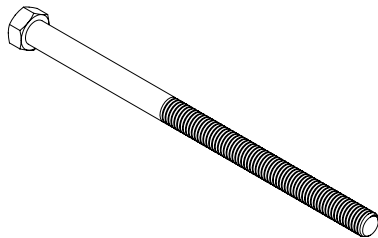

Example of housing bushing bolt



**Extreme pressure lube container,
If supplied with tool (J-23444-A pack
of 5 replacement)**